


BST 68 – 6 RZ

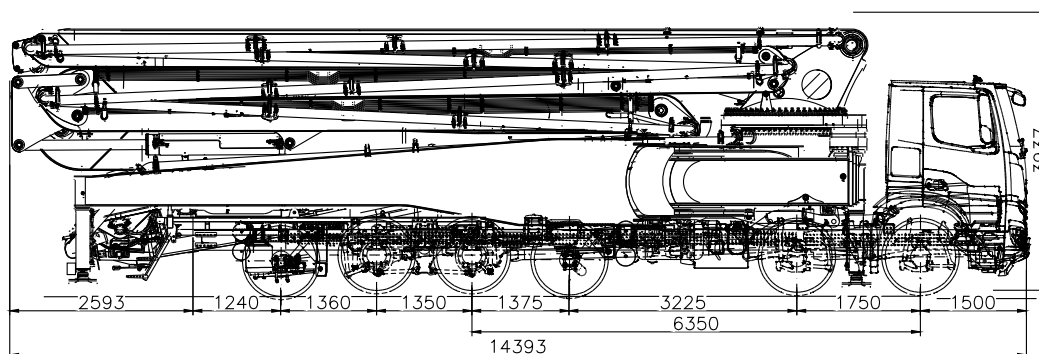

Note: Standard pump model is BST 68.16 6RZ.

Dimensions may vary depending on truck model.

PUMP GROUP	BST 68.16 6RZ	BST 68.20 6RZ
	Standard	Optional
Theo. Conc. Output (max) (Piston Side)	160 m³/h	200 m³/h
Theo. Conc. Pressure (max) (Piston Side)	81 bar	81 bar
Stroke	26 Stroke / min	27 Stroke / min
Concrete Cylinder Dimensions	250 mm x 2100 mm	250 mm x 2500 mm

STANDARD EQUIPMENT

Hopper Capacity	: 650 l
Switching System	: Elect. Magn. Sensor
Concrete Valve	: S Valve System
Electric Box	: Waterproof and PLC Controlled
Remote Control	: Included (HETRONIC)
End Hose	: 3 m
Water Pump	: 67 lpm
Water Tank Capacity	: 1000 l and Hose 15 m
Lubrication System	: Hydraulic (LINCOLN)
Driven by	: PTO or Gear Box

BOOM SYSTEM

Boom Type	: RZ
Sections	: 6
Boom Swing Time	: 264 sec
Boom Swinging Angle	: 365°
Concrete Pipe Diameter	: 125 mm

SUPPORT LEGS SYSTEM

Front Legs	: Side Hydraulic Swing
Rear Legs	: Side Hydraulic Swing

CONTROL SYSTEM

Smartstar Control	
Color LCD	
Rear Keyboard	
Diagnostic	
Fuel Saving Mode	

OPTIONS

■ Hopper Vibrator	
■ Hydraulic Driven Fan	
■ Stability Control	
■ Air Compressor	
■ End Hose Squeeze Valve	
■ High Pressure Cleaning Kit (160 bar)	
■ Betonstar IoT System	
■ Remote Control (HBC)	
■ Water and Oil Tank Heater	

BOOM WORKING DIAGRAM

